



Max OAH and max material thickness cannot be obtained on the same part since they have an inverse relationship in the manufacturing process. See the LCRC chart for a graphical representation of this relationship or use cylinder calculation pages on our website to check specific dimensions and or to place a RFQ.

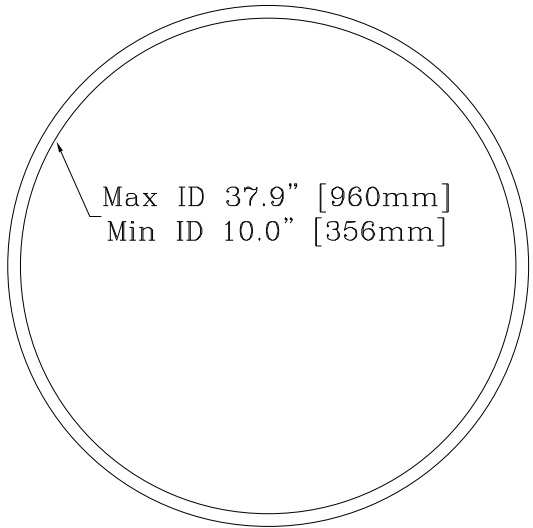

Wall Thickness
 Max 6Ga. 0.189" [4.8mm]
 Min 20Ga. 0.036" [1.0mm]

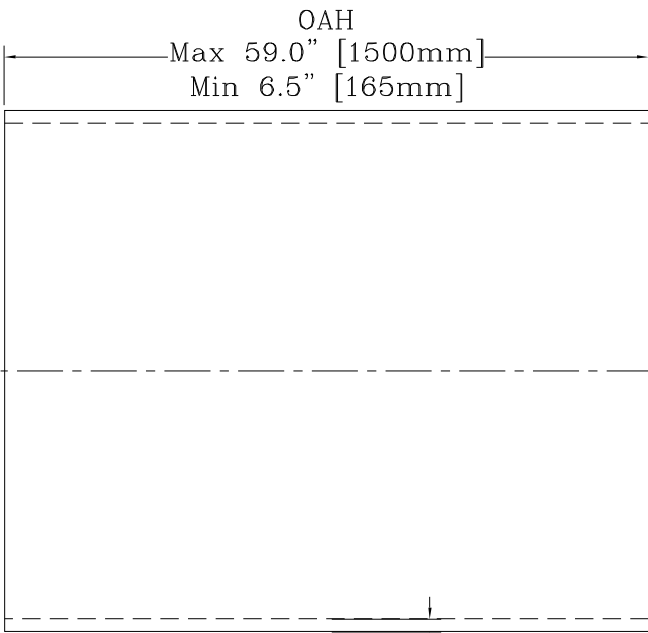

TOLEDO METAL SPINNING Co.
 1819 Clinton Street, Toledo, OH 43607
 Tel:(419)535-5931 Fax:(419)535-0565
 www.toledometal spinning.com

P/N: L-CY-PL-xDxx.xxx
 Desc: Standard single flange cylinder for SC
 Material: Al, M/S, SS, Inco. 625
 DWG# L-CY-PL-xDxx.xxx.dwg Rev# N/C

Unless otherwise specified (DU = Inches)
 Tolerances:
 X. ±0.25 X.XX ±0.030 X.XXXX ±0.001
 X.X ±0.12 X.XXX ±0.010 Ang. ±0.25
 Break all edges with R1/32" to R1/16"